



STANDARD EINBAULEUCHTEN
RECESSED LUMINAIRES STANDARDS

www.cardanlight.com

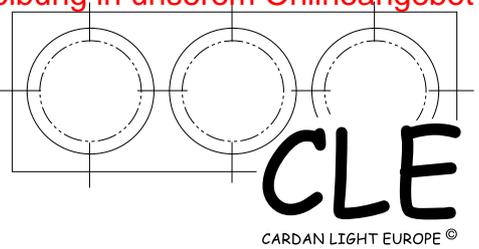

YK 11 Modo Micro



XF8017..

- ..A alu grau / *alu grey*
..W weiß / *white*

 1x 35-70 W CDM-T
(inkl. Steckverbindung)

 ø 152 mm

 IP20

 CE

 0,50

 90°

*adjustable max 60°
ø 170 mm
radiate broad*


*Material:
pressure die-cast aluminium*

kipp- und schwenkbar max. 60°
ø 170 mm
breitstrahlend

Material:
Aluminium Druckguß



YK 8016



XF8016..

- ..A alu grau / *alu grey*
..W weiß / *white*

 1x 35-150 W CDM-T
(inkl. Steckverbindung)

 ø 240 mm

 IP20

 CE

 0,50

*adjustable
ø 260 mm*

*Material:
pressure die-cast aluminium*

kipp- und schwenkbar
ø 260 mm

Material:
Aluminium Druckguß